

GENERAL DESCRIPTION / APPLICATIONS

DIMENSIONS mm




Three way direct acting solenoid valve with spring return, normally close.

Suitable for gaseous and liquid media compatible with the used material (body/seals), vacuum.

Forged brass body.
Stainless steel guide tube.
Stainless steel internal parts.
Stainless steel springs.

Solenoid can be rotated 360°.

Valve will operate in any position.

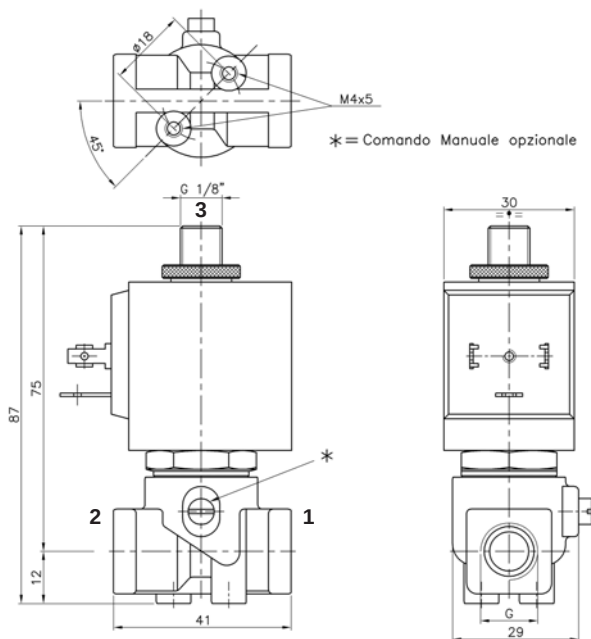


ELETTICAL INFORMATION

Continuous duty glass-reinforced nylon moulded coil with electrical connection suitable for DIN-43650 plug (2 poles+ground) or faston wire terminal . Two cables available on request.

Coil type:	C3
Insulation class:	F (155°C), H (180°C) on request.
Winding wire class:	H (180°C)
Protection class:	Waterproof IP-65 (norme EN60529) when properly plug connetted when DIN-43650 plug.
Duty:	Continuous (S.I.) 100% ED
Power consumption:	Alternate Current 13VA (inrush 20VA) Direct Current 8W
Voltage tolerance:	a.c. +10% ÷ -15%, d.c. +10% ÷ -5%
Electrical Insulation:	>500 MOhm
Dielectrical Strenght:	>2000 V/1'
Standard voltage:	d.c. 12, 24 Volt a.c. 24, 110, 230 Volt (50/60 Hz) other voltages available on request.

OPERATION

Normally closed



In :	2
Out :	1
Vent :	3
Coil de-energised :	Input 2 closed
	From 1 to vent 3
Coil energised :	From 2 to 1
	Vent 3 closed

SPECIFICATIONS AND AVAILABLE OPTIONS

MODEL						ORIFICE mm	BODY RATING	PRESSURES IN BAR MIN. / MAX. DIFFERENZIAL PRESSURES			Flow factor kv (liters/min.')	Weight Kg
a	b	c	d	e	f		MAX.	MIN.	MAX. AC~	MAX. DC=		
	C 02			15		1,5 (1,5)	15	0	15	15	1,2	0,33
	C 02			20		2,0 (2,0)	13	0	13	13	1,7	0,33
	C 02			25		2,4 (2,4)	10	0	10	10	2,3	0,33

a Construction	b Valve type	c Port size G	d Seals material	e Body material	f Optional feature
A AC C DC	C 3 way	B 2 and 1 : 1/8" GAS C 2 and 1 : 1/4" GAS 3 : 1/8" GAS	B NBR V VITON E EPDM	T Brass N Nichel-plated brass	M Manual override SG Clean for oxigene